

Selected Model			
Engine: 3306	Generator Frame: 446	Genset Rating (kW): 200.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1093787	Genset Rating (kVA): 250.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 328.0
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current
Version: 39094 /38912 /40602 /13829			

Spec Information

Generator Specification			Generator Efficiency		
Frame: 446	Type: SR4	No. of Bearings: 1	Per Unit Load	kW	Efficiency %
Winding Type: RANDOM WOUND			0.25	50.0	90.5
Flywheel: 14.0			0.5	100.0	93.3
Connection: SERIES STAR			0.75	150.0	93.5
Housing: 1			1.0	200.0	92.8
Phases: 3			1.1	220.0	92.2
No. of Leads: 12					
Poles: 4					
Wires per Lead: 2					
Sync Speed: 1800					
Generator Pitch: 0.75					

Reactances		Per Unit	Ohms
SUBTRANSIENT - DIRECT AXIS X'' _d		0.2116	0.1639
SUBTRANSIENT - QUADRATURE AXIS X'' _q		0.2366	0.1832
TRANSIENT - SATURATED X' _d		0.3806	0.2947
SYNCHRONOUS - DIRECT AXIS X _d		4.0754	3.1560
SYNCHRONOUS - QUADRATURE AXIS X _q		2.4112	1.8672
NEGATIVE SEQUENCE X ₂		0.2240	0.1735
ZERO SEQUENCE X ₀		0.0610	0.0472

Time Constants		Seconds
OPEN CIRCUIT TRANSIENT - DIRECT AXIS T' _{d0}		1.7060
SHORT CIRCUIT TRANSIENT - DIRECT AXIS T' _d		0.1619
OPEN CIRCUIT SUBTRANSIENT - DIRECT AXIS T'' _{d0}		0.0043
SHORT CIRCUIT SUBTRANSIENT - DIRECT AXIS T'' _d		0.0035
OPEN CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T'' _{q0}		0.0045
SHORT CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T'' _q		0.0037
EXCITER TIME CONSTANT T _e		0.1144
ARMATURE SHORT CIRCUIT T _a		0.0204

Short Circuit Ratio: 0.45	Stator Resistance = 0.0358 Ohms	Field Resistance = 0.961 Ohms
---------------------------	---------------------------------	-------------------------------


Voltage Regulation		Generator Excitation			
Voltage level adjustment: +/-	5.0%	No Load	Full Load, (rated) pf		
Voltage regulation, steady state: +/-	0.5%		Series	Parallel	
Voltage regulation with 3% speed change: +/-	0.5%	Excitation voltage:	8.17 Volts	28.94 Volts	Volts
Waveform deviation line - line, no load: less than	5.0%	Excitation current	1.81 Amps	5.28 Amps	Amps
Telephone influence factor: less than	50				

Selected Model

Engine: 3306	Generator Frame: 446	Genset Rating (kW): 200.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1093787	Genset Rating (kVA): 250.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 328.0
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current
Version: 39094 /38912 /40602 /13829			

Generator Mechanical Information

Center of Gravity		
Dimension X	-548.6 mm	-21.6 IN.
Dimension Y	0.0 mm	0.0 IN.
Dimension Z	0.0 mm	0.0 IN.
"X" is measured from driven end of generator and parallel to rotor. Towards engine fan is positive. See General Information for details "Y" is measured vertically from rotor center line. Up is positive. "Z" is measured to left and right of rotor center line. To the right is positive.		
Generator WT = 802 kg * Rotor WT = 270 kg * Stator WT = 532 kg 1,768 LB 595 LB 1,173 LB		
Rotor Balance = 0.0508 mm deflection PTP Overspeed Capacity = 150% of synchronous speed		

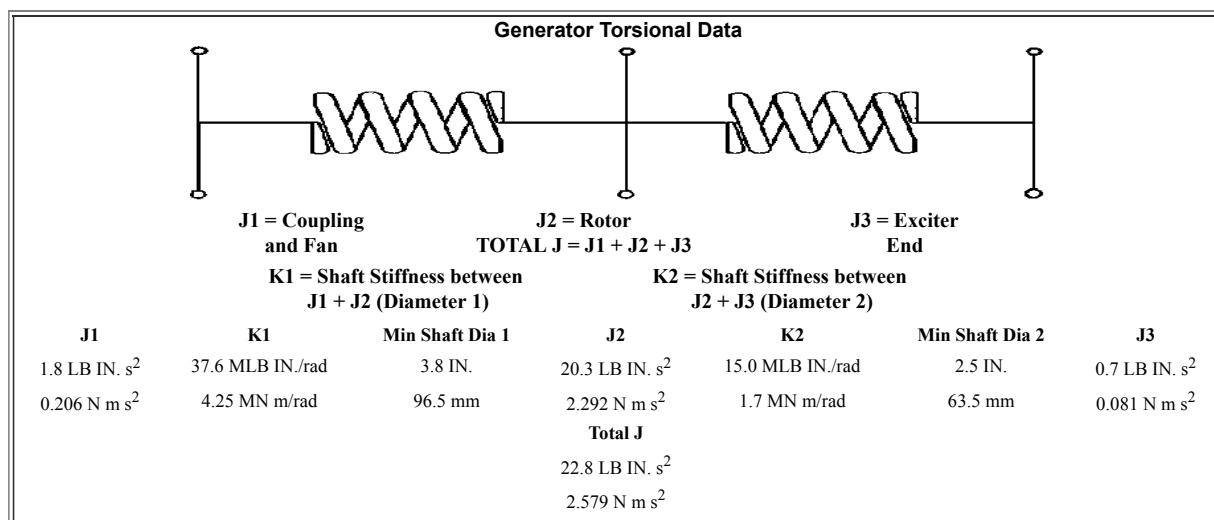


Selected Model			
Engine: 3306	Generator Frame: 446	Genset Rating (kW): 200.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1093787	Genset Rating (kVA): 250.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 328.0
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current
Version: 39094 /38912 /40602 /13829			

Generator Cooling Requirements - Temperature - Insulation Data	
Cooling Requirements:	Temperature Data: (Ambient 40 °C)
Heat Dissipated: 15.5 kW	Stator Rise: 105.0 °C
Air Flow: 64.2 m ³ /min	Rotor Rise: 105.0 °C
Insulation Class: H	
Insulation Reg. as shipped: 100.0 MΩ minimum at 40 °C	
Thermal Limits of Generator	
Frequency:	60 Hz
Line to Line Voltage:	440 Volts
B BR 80/40	212.0 kVA
F BR -105/40	256.0 kVA
H BR - 125/40	284.0 kVA
F PR - 130/40	284.0 kVA

Selected Model			
Engine: 3306	Generator Frame: 446	Genset Rating (kW): 200.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1093787	Genset Rating (kVA): 250.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 328.0
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current
Version: 39094 /38912 /40602 /13829			


Starting Capability & Current Decrement
Motor Starting Capability (0.4 pf)

SKVA	Percent Volt Dip
28	2.5
57	5.0
87	7.5
120	10.0
154	12.5
190	15.0
229	17.5
269	20.0
313	22.5
359	25.0
409	27.5
462	30.0
519	32.5
580	35.0
647	37.5
718	40.0

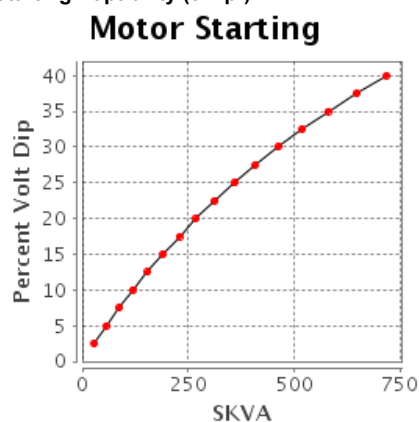

Current Decrement Data

E Time Cycle	AMP
0.0	1,517
1.0	796
2.0	726
3.0	668
4.0	616
5.0	569
7.5	470
10.0	398
12.5	433
15.0	492
20.0	619
25.0	749
30.0	835
35.0	881
40.0	911
45.0	934

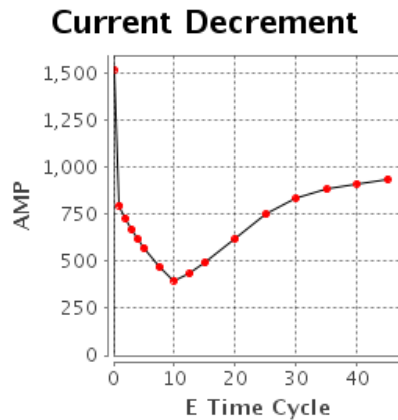

Instantaneous 3 Phase Fault Current: 1517 Amps

Instantaneous Line - Line Fault Current: 1276 Amps

Instantaneous Line - Neutral Fault Current: 1940 Amps

Engine: 3306
 Fuel: Diesel
 Frequency: 60
 Duty: PRIME

Generator Frame: 446
 Generator Arrangement: 1093787
 Excitation Type: Permanent Magnet
 Connection: SERIES STAR

Selected Model

Genset Rating (kW): 200.0
 Genset Rating (kVA): 250.0
 Pwr. Factor: 0.8
 Application: EPG


Line Voltage: 440
 Phase Voltage: 254
 Rated Current: 328.0
 Status: Current

Version: 39094 /38912 /40602 /13829

Generator Output Characteristic Curves


Open Circuit Curve

Field Current	Line - Line Volt
0.0	0
7.3	264
8.6	308
10.1	352
11.8	396
14.3	440
18.3	484
25.7	528
40.6	572
71.9	616

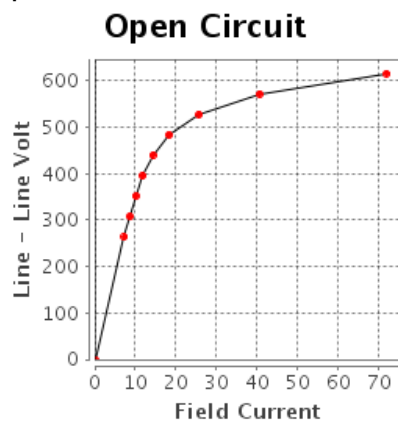

Short Circuit Curve

Field Current	Armature Current
0.0	0
20.1	197
23.4	230
26.8	262
30.1	295
33.4	328
36.8	361
40.1	394
43.5	426
46.8	459

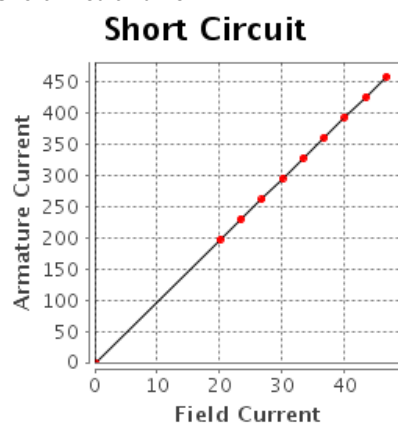

Engine: 3306
 Fuel: Diesel
 Frequency: 60
 Duty: PRIME

Generator Frame: 446
 Generator Arrangement: 1093787
 Excitation Type: Permanent Magnet
 Connection: SERIES STAR

Selected Model

Genset Rating (kW): 200.0
 Genset Rating (kVA): 250.0
 Pwr. Factor: 0.8
 Application: EPG

Line Voltage: 440
 Phase Voltage: 254
 Rated Current: 328.0
 Status: Current


Version: 39094 /38912 /40602 /13829

Generator Output Characteristic Curves

Zero Power Factor Curve

Zero Power


Field Current	Line - Line Volt
33.4	0
45.2	220
48.0	264
52.8	308
62.0	352
80.8	396
121.0	440
208.4	484
399.8	528
820.9	572

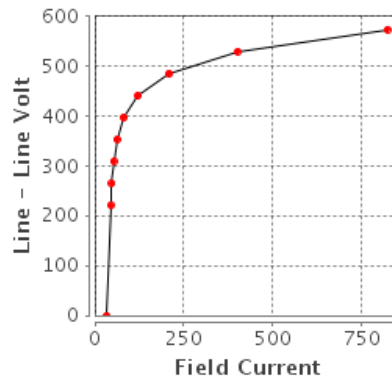

Air Gap Curve

Air Gap

Field Current	Line - Line Volt
0.0	0
7.2	264
8.4	308
9.6	352
10.8	396
12.0	440
13.2	484
14.4	528
15.6	572
16.8	616

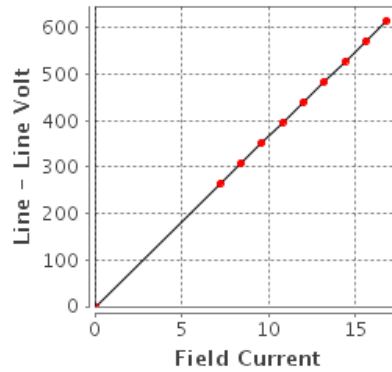

Selected Model

Engine: 3306

Generator Frame: 446

Genset Rating (kW): 200.0

Line Voltage: 440

Fuel: Diesel

Generator Arrangement: 1093787

Genset Rating (kVA): 250.0

Phase Voltage: 254

Frequency: 60

Excitation Type: Permanent Magnet

Pwr. Factor: 0.8

Rated Current: 328.0

Duty: PRIME

Connection: SERIES STAR


Application: EPG

Status: Current

Version: 39094 / 38912 / 40602 / 13829

Reactive Capability Curve

Operating Chart

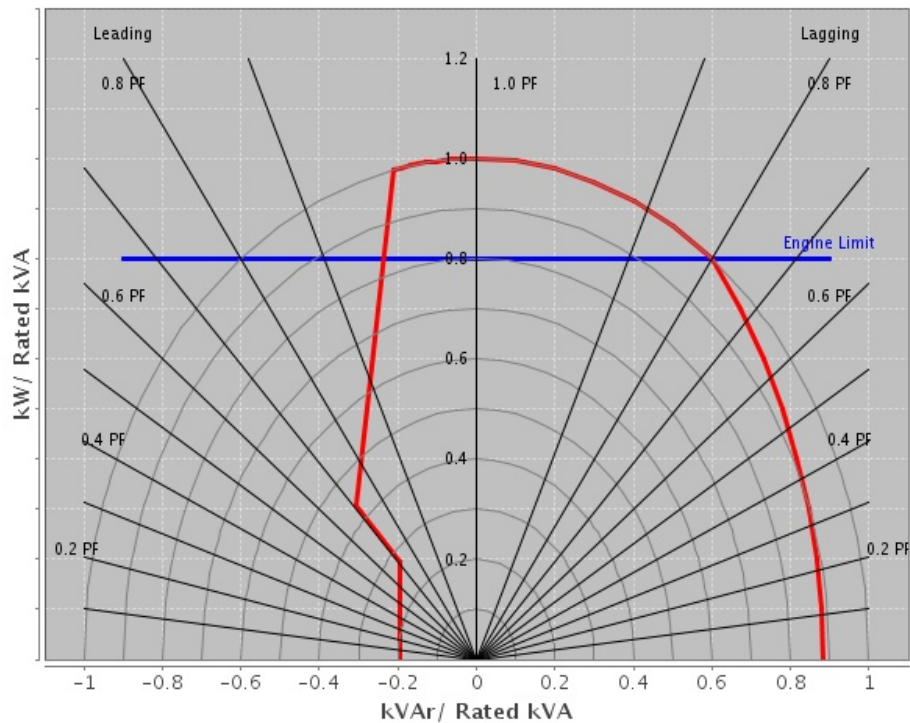

Selected Model			
Engine: 3306	Generator Frame: 446	Genset Rating (kW): 200.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1093787	Genset Rating (kVA): 250.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 328.0
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current
			Version: 39094 /38912 /40602 /13829

General Information

DM7802

GENERATOR GENERAL INFORMATION

I. GENERATOR MOTOR STARTING CAPABILITY CURVES

A. THE MOTOR STARTING CURVES ARE REPRESENTATIVE OF THE DATA OBTAINED BY THE FOLLOWING PROCEDURE:

1. THE CATERPILLAR GENERATOR IS DRIVEN BY A SYNCHRONOUS DRIVER.
2. VARIOUS SIZE THREE PHASE INDUCTION MOTORS (NEMA CODE F) ARE STARTED ACROSS THE LINE LEADS OF THE UNLOADED GENERATOR.
3. THE RESULTING VOLTAGE DIPS ARE RECORDED WITH AN OSCILLOSCOPE.
4. MOTOR HORSEPOWER HAS BEEN CONVERTED TO STARTING KILOVOLT AMPERES (SKVA).
5. RECORDED VOLTAGE DIPS HAVE BEEN EXPRESSED AS A OF GENERATOR RATED VOLTAGE.

II. USE OF THE MOTOR STARTING CAPABILITY CURVES.

A. CALCULATE THE SKVA REQUIRED BY THE MOTOR FOR FULL VOLTAGE STARTING ACROSS THE LINE IF THE VALUE IS NOT LISTED ON THE MOTOR DATA PLATE.

1. MOTORS CONFORMING TO NEMA STANDARDS
MULTIPLY THE MOTOR HORSEPOWER BY THE NEMA SKVA/HP FIGURE. FOR NEMA CODE F, USE 5.3 SKVA/HP; FOR NEMA CODE G, USE 6.0 SKVA/HP.
2. ALL OTHER MOTORS:
MULTIPLY THE RATED VOLTAGE BY THE LOCKED ROTOR AMPERE AND BY 0.001732. (IF THE LOCKED ROTOR AMPERES ARE NOT LISTED, MULTIPLY THE FULL LOAD (RUNNING) AMPERES BY

B. USE THE ABOVE SKVA WITH THE MOTOR STARTING TABLE.

1. ACROSS LINE STARTING:

READ ACROSS THE ROW OF "ACROSS THE LINE STARTING SKVA IF THE DESIRED VALUE OF SKVA IS NOT GIVEN, CALCULATE THE DIP BY FINDING THE PROPER SKVA INTERVAL AND INTERPOLATING AS FOLLOWS:

SKVA1 IS THE SKVA TABLE ENTRY JUST SMALLER THAN THE DESIRED SKVA, DIP1 IS THE DIP FOR SKVA2, AND SKVA2 IS THE SKVA TABLE ENTRY JUST GREATER THAN THE DESIRED SKVA. THE DIP (IN PERCENT) AT THE DESIRED SKVA IS:

$$\text{DIP} = \text{DIP1} + (\text{SKVA} - \text{SKVA1}) * 2.5 / (\text{SKVA2} - \text{SKVA1})$$

NOTE: VOLTAGE DIPS GREATER THAN 35% MAY CAUSE MAGNETIC CONTACTORS TO DROP OUT.

2. REDUCED VOLTAGE STARTING:

REFER TO THE FOLLOWING TABLE. MULTIPLY THE CALCULATE ACROSS LINE SKVA BY THE MULTIPLIER LISTED FOR THE SPECIFIC STARTING METHOD. APPLY THE RESULT TO THE STARTING TABLE AS IN II A, TO CALCULATE THE EXPECTED VOLTAGE DIP:

TYPE OF REDUCED VOLTAGE STARTING	MULTIPLY LINE SKVA BY
80% TAP	.80
65% TAP	.65
50% TAP	.50
45% TAP	.45
Wye start, delta run	.33

AUTOTRANSFORMER

80% TAP	.68
65% TAP	.46
50% TAP	.29

NOTE: REDUCE VOLTAGE STARTING LOWERS THE MAXIMUM REQUIRED MOTOR skVA.

3. Part winding starting:

Most common is half-winding start, full-winding run.
Multiply the full motor, across line starting skVA by 0.6. Apply the result to the selected curve as in ii. A above. Read the expected voltage dip, for the required skVA.

III. DEFINITION:

A. GENERATOR TERMS

MODEL: Engine Sales model

ENG TYPE: DI = Direct Injection,

NA = Naturally aspirated, etc

HZ: Running frequency, hertz

RATING TYPE: PP, SB (prime power or standby)

KW: Base rating electrical kilowatts (ekW)

VOLTS: Rating terminal, line to line

GEN ARR: Cat generator arrangement part number

GEN FRAME: Generator frame size designation

CONN: Generator output connection

(star, wye, delta, ect.)

POLES: Number of pole pieces on rotor.

(eg. A 4 pole generator run at 1800)

RPM will produce 60 Hz alternating current. A 6 pole generator run at 1200 RPM will produce 60 Hz alternating current.)

B. GENERATOR TEMPERATURE RISE:

The indicated temperature rise indicated the NEMA limits for standby or prime power applications. These rises are used for calculating the losses and efficiencies and are not necessarily indicative of the actual temperature rise of a given machine.

C. CENTER OF GRAVITY

The specified center of gravity is for the generator only.

For single bearing, and two bearing close coupled generators, the center of gravity is measured from the generator/engine flywheel housing interface and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

D. GENERATOR DECREMENT CURRENT CURVES

The generator decrement current curve gives the symmetrical current supplied by the generator for a three phase bolted fault at the generator terminals. Generators equipped with the series boost attachment or generators with PM excitation system will supply 300% of rated current for at least 10 seconds.

E. GENERATOR EFFICIENCY CURVES

The efficiency curve is representative of the overall generator efficiency over the normal range of the electrical load and at the specified parameters. This is not the overall engine generator set efficiency curve.

Caterpillar Confidential: **Green**

Content Owner: Commercial Processes Division

Web Master(s): [PSG Web Based Systems Support](#)

Current Date: 7/2/2020, 7:35:06 AM

© Caterpillar Inc. 2020 All Rights Reserved.

[Data Privacy Statement](#).