

GENERATOR DATA

MARCH 21, 2019

For Help Desk Phone Numbers [Click here](#)

Selected Model

Engine: 3508 **Generator Frame:** 663 **Genset Rating (kW):** 425.0 **Line Voltage:** 440
Fuel: Diesel **Generator Arrangement:** 1586410 **Genset Rating (kVA):** 531.0 **Phase Voltage:** 254
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 696.8
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 39094 /38433 /38180 /8910

Spec Information

Generator Specification			Generator Efficiency		
Frame: 663	Type: SR4B	No. of Bearings: 2	Per Unit Load	kW	Efficiency %
Winding Type: FORM WOUND			0.25	106.3	90.2
Connection: SERIES STAR			0.5	212.5	92.8
Phases: 3			0.75	318.8	92.9
Poles: 6			1.0	425.0	92.4
Sync Speed: 1200			1.1	467.5	92.1

Reactances	Per Unit	Ohms
SUBTRANSIENT - DIRECT AXIS X'' _d	0.2225	0.0811
SUBTRANSIENT - QUADRATURE AXIS X'' _q	0.2129	0.0776
TRANSIENT - SATURATED X' _d	0.3361	0.1225
SYNCHRONOUS - DIRECT AXIS X _d	2.3909	0.8713
SYNCHRONOUS - QUADRATURE AXIS X _q	1.2804	0.4666
NEGATIVE SEQUENCE X ₂	0.2176	0.0793
ZERO SEQUENCE X ₀	0.0123	0.0045

Time Constants	Seconds
OPEN CIRCUIT TRANSIENT - DIRECT AXIS T' _{d0}	2.0330
SHORT CIRCUIT TRANSIENT - DIRECT AXIS T' _d	0.2858
OPEN CIRCUIT SUBTRANSIENT - DIRECT AXIS T'' _{d0}	0.0109
SHORT CIRCUIT SUBTRANSIENT - DIRECT AXIS T'' _d	0.0073
OPEN CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T'' _{q0}	0.0061
SHORT CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T'' _q	0.0047
EXCITER TIME CONSTANT T _e	0.2225
ARMATURE SHORT CIRCUIT T _a	0.0215

Short Circuit Ratio: 0.47	Stator Resistance = 0.018 Ohms	Field Resistance = 0.802 Ohms
---------------------------	--------------------------------	-------------------------------

Voltage Regulation		Generator Excitation		
Voltage level adjustment: +/-	5.0%	No Load	Full Load, (rated) pf	
Voltage regulation, steady state: +/-	0.5%		Series	Parallel
Voltage regulation with 3% speed change: +/-	0.5%	Excitation voltage:	8.03 Volts	33.86 Volts
Waveform deviation line - line, no load: less than	3.0%	Excitation current	2.11 Amps	7.33 Amps
Telephone influence factor: less than	50			

Selected Model

Engine: 3508 **Generator Frame:** 663 **Genset Rating (kW):** 425.0 **Line Voltage:** 440
Fuel: Diesel **Generator Arrangement:** 1586410 **Genset Rating (kVA):** 531.0 **Phase Voltage:** 254
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 696.8
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 39094 /38433 /38180 /8910

Generator Mechanical Information

Center of Gravity		
Dimension X	0.0 mm	0.0 IN.
Dimension Y	0.0 mm	0.0 IN.
Dimension Z	0.0 mm	0.0 IN.

- "X" is measured from driven end of generator and parallel to rotor. Towards engine fan is positive. See General Information for details
- "Y" is measured vertically from rotor center line. Up is positive.
- "Z" is measured to left and right of rotor center line. To the right is positive.

Generator WT = 0 kg	* Rotor WT = 1746 kg	* Stator WT = 0 kg
0.0 LB	3,849 LB	0.0 LB

Rotor Balance = 0.0508 mm deflection PTP
Overspeed Capacity = 150% of synchronous speed

Generator Torsional Data

J1 = Coupling and Fan

K1 = Shaft Stiffness between J1 + J2 (Diameter 1)

J2 = Rotor

TOTAL J = J1 + J2 + J3

J3 = Exciter End

K2 = Shaft Stiffness between J2 + J3 (Diameter 2)

J1	K1	Min Shaft Dia 1	J2	K2	Min Shaft Dia 2	J3
0.0 LB IN. s ²	31.0 MLB IN./rad	4.3 IN.	0.0 LB IN. s ²	27.4 MLB IN./rad	3.8 IN.	0.0 LB IN. s ²
0.0 N m s ²	3.5 MN m/rad	109.2 mm	0.0 N m s ²	3.1 MN m/rad	96.5 mm	0.0 N m s ²
Total J						
			0.0 LB IN. s ²			
			0.0 N m s ²			

Selected Model

Engine: 3508	Generator Frame: 663	Genset Rating (kW): 425.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1586410	Genset Rating (kVA): 531.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 696.8
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current

Version: 39094 /38433 /38180 /8910

Generator Cooling Requirements - Temperature - Insulation Data		
Cooling Requirements:		Temperature Data: (Ambient 40 °C)
Heat Dissipated: 35.0 kW	Stator Rise:	105.0 °C
Air Flow: 0.0 m ³ /min	Rotor Rise:	105.0 °C
Insulation Class: H		
Insulation Reg. as shipped: 100.0 MΩ minimum at 40 °C		
Thermal Limits of Generator		
Frequency:	60 Hz	
Line to Line Voltage:	440 Volts	
B BR 80/40	472.0 kVA	
F BR -105/40	569.0 kVA	
H BR - 125/40	626.0 kVA	
F PR - 130/40	626.0 kVA	


Selected Model

Engine: 3508	Generator Frame: 663	Genset Rating (kW): 425.0	Line Voltage: 440
Fuel: Diesel	Generator Arrangement: 1586410	Genset Rating (kVA): 531.0	Phase Voltage: 254
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 696.8
Duty: PRIME	Connection: SERIES STAR	Application: EPG	Status: Current

Version: 39094 /38433 /38180 /8910

**Starting Capability & Current Decrement
Motor Starting Capability (0.4 pf)**


SKVA	Percent Volt Dip
44	2.5
90	5.0
138	7.5
190	10.0
244	12.5
301	15.0
362	17.5
427	20.0
496	22.5
569	25.0
648	27.5
732	30.0
822	32.5
919	35.0
1,025	37.5
1,138	40.0

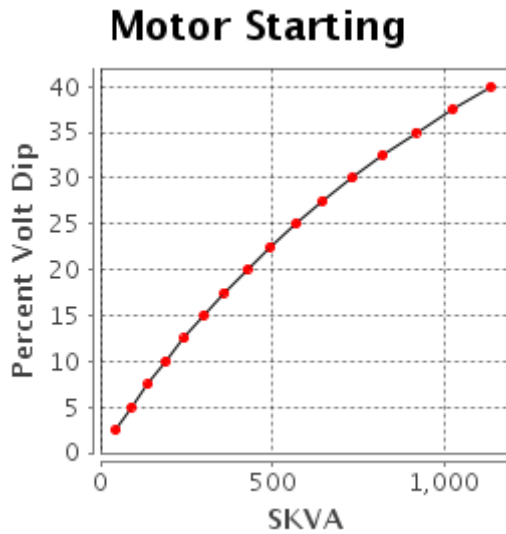

Current Decrement Data

E Time Cycle	AMP
0.0	3,107
1.0	2,082
2.0	1,890
3.0	1,791
4.0	1,705
5.0	1,626
7.5	1,446
10.0	1,291
12.5	1,156
15.0	1,040
20.0	968
25.0	1,097
30.0	1,252
35.0	1,409
40.0	1,568
45.0	1,726

Current Decrement

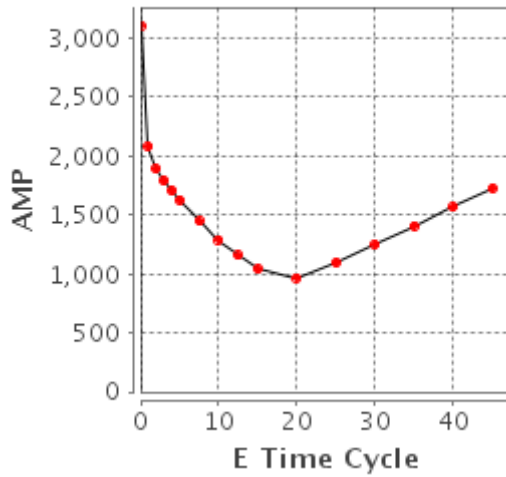

Instantaneous 3 Phase Fault Current: 3107 Amps

Instantaneous Line - Line Fault Current: 2720 Amps

Instantaneous Line - Neutral Fault Current: 4585 Amps

Selected Model


Engine: 3508 **Generator Frame:** 663 **Genset Rating (kW):** 425.0 **Line Voltage:** 440
Fuel: Diesel **Generator Arrangement:** 1586410 **Genset Rating (kVA):** 531.0 **Phase Voltage:** 254
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 696.8
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 39094 /38433 /38180 /8910

**Generator Output Characteristic Curves
Open Circuit Curve**

Open Circuit


Field Current	Line - Line Volt
0.0	0
11.7	264
13.7	308
15.9	352
18.4	396
21.4	440
25.6	484
32.3	528
44.3	572
67.6	616

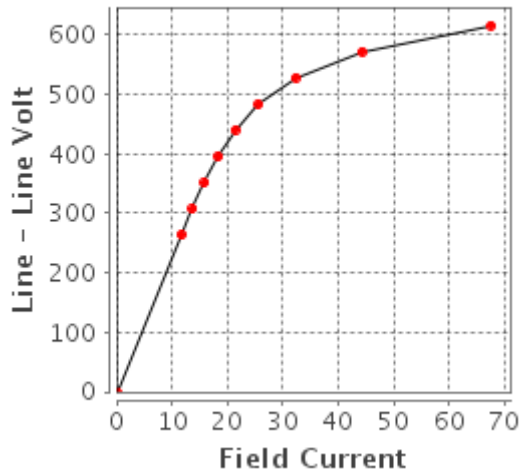

Short Circuit Curve

Short Circuit

Field Current	Armature Current
0.0	0
26.7	418
31.2	488
35.6	558
40.1	627
44.5	697
49.0	767
53.4	837
57.9	906
62.4	976

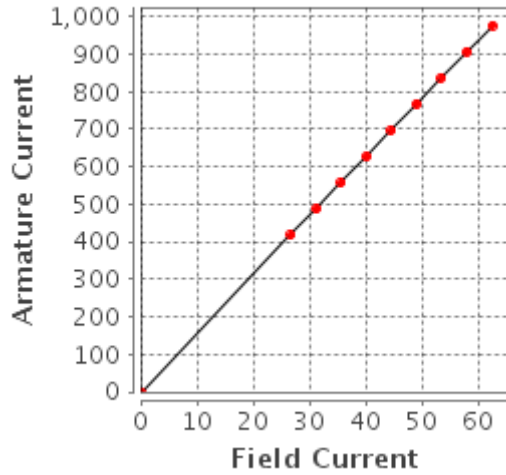

Selected Model


Engine: 3508 **Generator Frame:** 663 **Genset Rating (kW):** 425.0 **Line Voltage:** 440
Fuel: Diesel **Generator Arrangement:** 1586410 **Genset Rating (kVA):** 531.0 **Phase Voltage:** 254
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 696.8
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 39094 /38433 /38180 /8910

Generator Output Characteristic Curves
Zero Power Factor Curve

Zero Power


Field Current	Line - Line Volt
44.5	0
61.4	220
64.4	264
68.3	308
74.5	352
85.2	396
105.8	440
147.2	484
232.6	528
411.0	572

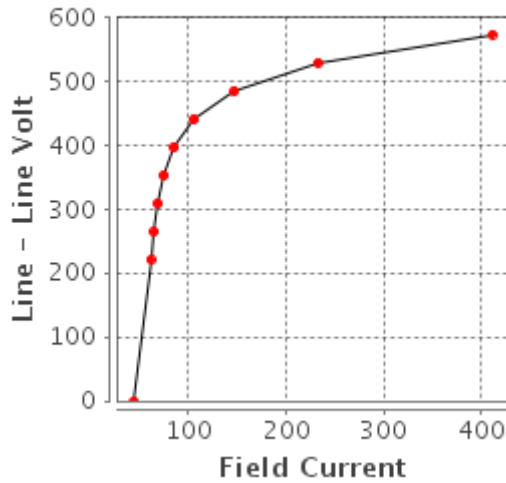

Air Gap Curve

Air Gap

Field Current	Line - Line Volt
0.0	0
11.6	264
13.5	308
15.5	352
17.4	396
19.3	440
21.3	484
23.2	528
25.1	572
27.1	616

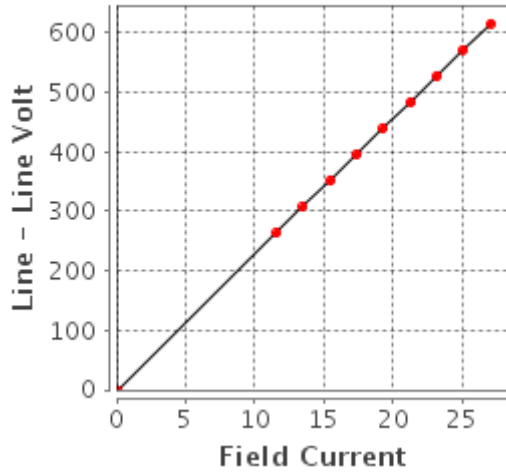


Selected Model

Engine: 3508 **Generator Frame:** 663 **Genset Rating (kW):** 425.0 **Line Voltage:** 440
Fuel: Diesel **Generator Arrangement:** 1586410 **Genset Rating (kVA):** 531.0 **Phase Voltage:** 254
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 696.8
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 39094 /38433 /38180 /8910

**Reactive Capability Curve
Operating Chart**

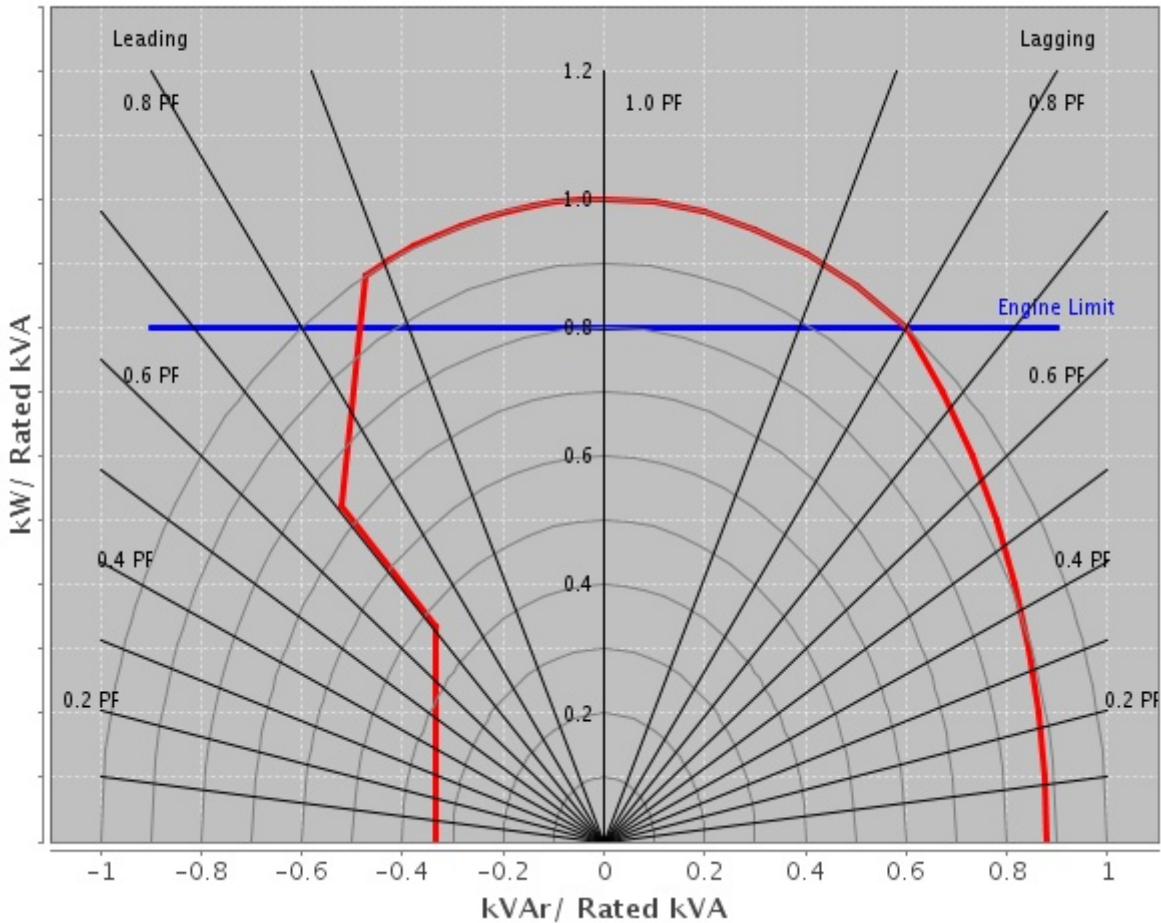

Selected Model

Engine: 3508 **Generator Frame:** 663 **Genset Rating (kW):** 425.0 **Line Voltage:** 440
Fuel: Diesel **Generator Arrangement:** 1586410 **Genset Rating (kVA):** 531.0 **Phase Voltage:** 254
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 696.8
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 39094 /38433 /38180 /8910

General Information

DM7802

GENERATOR GENERAL INFORMATION

I. GENERATOR MOTOR STARTING CAPABILITY CURVES

A. THE MOTOR STARTING CURVES ARE REPRESENTATIVE OF THE DATA OBTAINED BY THE FOLLOWING PROCEDURE:

1. THE CATERPILLAR GENERATOR IS DRIVEN BY A SYNCHRONOUS DRIVER.
2. VARIOUS SIZE THREE PHASE INDUCTION MOTORS (NEMA CODE F) ARE STARTED ACROSS THE LINE LEADS OF THE UNLOADED GENERATOR.
3. THE RESULTING VOLTAGE DIPS ARE RECORDED WITH AN OSCILLOSCOPE.
4. MOTOR HORSEPOWER HAS BEEN CONVERTED TO STARTING KILOVOLT AMPERES (SKVA).
5. RECORDED VOLTAGE DIPS HAVE BEEN EXPRESSED AS A PERCENT OF GENERATOR RATED VOLTAGE.

II. USE OF THE MOTOR STARTING CAPABILITY CURVES.

A. CALCULATE THE SKVA REQUIRED BY THE MOTOR FOR FULL VOLTAGE STARTING ACROSS THE LINE IF THE VALUE IS NOT LISTED ON THE MOTOR DATA PLATE.

1. MOTORS CONFORMING TO NEMA STANDARDS
MULTIPLY THE MOTOR HORSEPOWER BY THE NEMA SKVA/HP FIGURE. FOR NEMA CODE F, USE 5.3 SKVA/HP; FOR NEMA CODE G, USE 6.0 SKVA/HP.

2. ALL OTHER MOTORS:

MULTIPLY THE RATED VOLTAGE BY THE LOCKED ROTOR AMPERE AND BY 0.001732. (IF THE LOCKED ROTOR AMPERES ARE NOT LISTED, MULTIPLY THE FULL LOAD (RUNNING) AMPERES BY 1.25)
B. USE THE ABOVE SKVA WITH THE MOTOR STARTING TABLE.

1. ACROSS LINE STARTING:

READ ACROSS THE ROW OF "ACROSS THE LINE STARTING SKVA" IF THE DESIRED VALUE OF SKVA IS NOT GIVEN, CALCULATE THE DIP BY FINDING THE PROPER SKVA INTERVAL AND INTERPOLATING AS FOLLOWS:

SKVA1 IS THE SKVA TABLE ENTRY JUST SMALLER THAN THE DESIRED SKVA, DIP1 IS THE DIP FOR SKVA1, AND SKVA2 IS THE SKVA TABLE ENTRY JUST GREATER THAN THE DESIRED SKVA. THE DIP (IN PERCENT) AT THE DESIRED SKVA IS:

$$\text{DIP} = \text{DIP1} + (\text{SKVA} - \text{SKVA1}) * 2.5 / (\text{SKVA2} - \text{SKVA1})$$

NOTE: VOLTAGE DIPS GREATER THAN 35% MAY CAUSE MAGNETIC CONTACTORS TO DROP OUT.

2. REDUCED VOLTAGE STARTING:

REFER TO THE FOLLOWING TABLE. MULTIPLY THE CALCULATED ACROSS LINE SKVA BY THE MULTIPLIER LISTED FOR THE SPECIFIC STARTING METHOD. APPLY THE RESULT TO THE STARTING TABLE AS IN II A, TO CALCULATE THE EXPECTED VOLTAGE DIP:

TYPE OF REDUCED VOLTAGE STARTING	MULTIPLY LINE SKVA BY
80% TAP	.80
65% TAP	.65
50% TAP	.50
45% TAP	.45
Wye start, delta run	.33

AUTOTRANSFORMER

80% TAP	.68
65% TAP	.46
50% TAP	.29

NOTE: REDUCE VOLTAGE STARTING LOWERS THE MAXIMUM

REQUIRED MOTOR skVA.

3. Part winding starting:

Most common is half-winding start, full-winding run.

Multiply the full motor, across line starting skVA by 0.6. Apply the result to the selected curve as in ii. A above. Read the expected voltage dip, for the required skVA.

III. DEFINITION:

A. GENERATOR TERMS

MODEL: Engine Sales model

ENG TYPE: DI = Direct Injection,

NA = Naturally aspirated, etc

HZ: Running frequency, hertz

RATING TYPE: PP, SB (prime power or standby)

KW: Base rating electrical kilowatts (ekW)

VOLTS: Rating terminal, line to line

GEN ARR: Cat generator arrangement part number

GEN FRAME: Generator frame size designation

CONN: Generator output connection

(star, wye, delta, ect.)

POLES: Number of pole pieces on rotor.

(eg. A 4 pole generator run at 1800)

RPM will produce 60 Hz alternating current. A 6 pole generator run at 1200 RPM will produce 60 Hz alternating current.)

B. GENERATOR TEMPERATURE RISE:

The indicated temperature rise indicated the NEMA limits for standby or prime power applications. These rises are used for calculating the losses and efficiencies and are not necessarily indicative of the actual temperature rise of a given machine.

C. CENTER OF GRAVITY

The specified center of gravity is for the generator only.

For single bearing, and two bearing close coupled generators, the center of gravity is measured from the generator/engine flywheel housing interface and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

D. GENERATOR DECREMENT CURRENT CURVES

The generator decrement current curve gives the symmetrical current supplied by the generator for a three phase bolted fault at the generator terminals. Generators equipped with the series boost attachment or generators with PM excitation system will supply 300% of rated current for at least 10 seconds.

E. GENERATOR EFFICIENCY CURVES

The efficiency curve is representative of the overall generator efficiency over the normal range of the electrical load and at the specified parameters. This is not the overall engine generator set efficiency curve.

Caterpillar Confidential: **Green**

Content Owner: Commercial Processes Division

Web Master(s): [PSG Web Based Systems Support](#)

Current Date: 3/21/2019, 12:54:04 PM
© Caterpillar Inc. 2019 All Rights Reserved.
[Data Privacy Statement](#).